


HUSH LIGHT - OVAL

Designed in association with David Trubridge Design Studio


PLN GROUP




DIMENSIONS

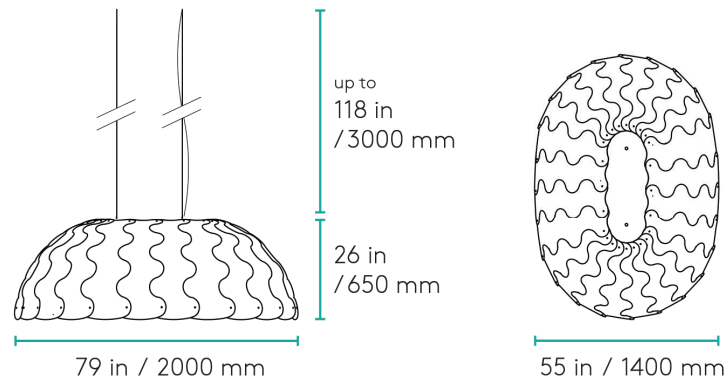


COLOR

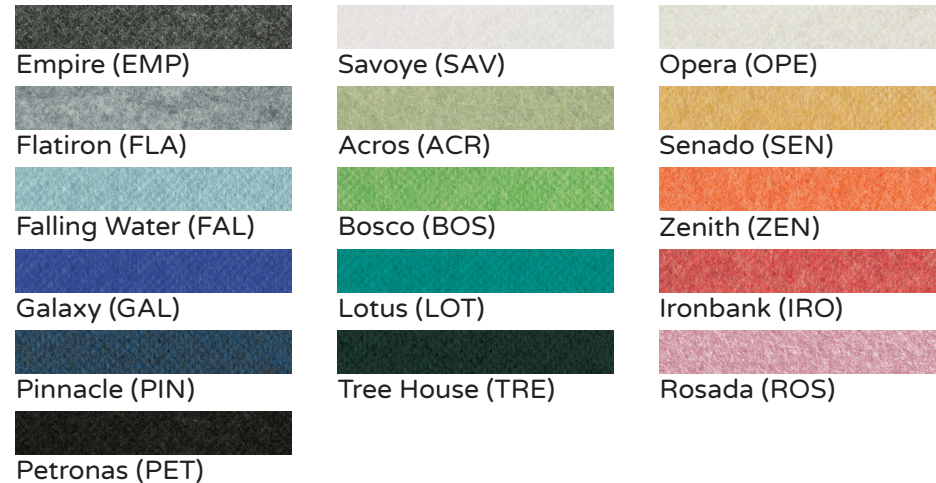

LAMPING OPTIONS:

- Hood Only
- E26 
- LED Pinpoint 3000K
*Ships standard with driver
SC Power KI-451050-TDL*

VOLTAGE OPTIONS:

- 110V
 - 277V
- 

LED CUSTOM OPTIONS:

Contact wakaNINE for available options

- _____ K
- _____ Lumens
- _____ Driver

SPECS:

Felt Panels:

.24 in / 6mm thick, 100% polyester. Minimum 65% post-consumer recycled PET bottle flake

Assembled size:

79 in L x 55 in x 26 in H
2000 mm L x 1400 mm W x 650 mm H

Net weight:

25.5 lb / 11.5 kg

Lamping Options:

1. Hood Only
2. 2 x E26 cordset (suggest frosted G40) / max 100W
3. 11 x Integrated, replaceable, energy-efficient LEDs 3000 Kelvin, CRI 90+, 22W, 4000 lumens


Declare.
Material only




Top of lighting panel with suspension wires. Hush Oval has two suspension wires (like those above) for easy hanging.



Hush Oval LED is illuminated by 11 pinpoint LEDs.

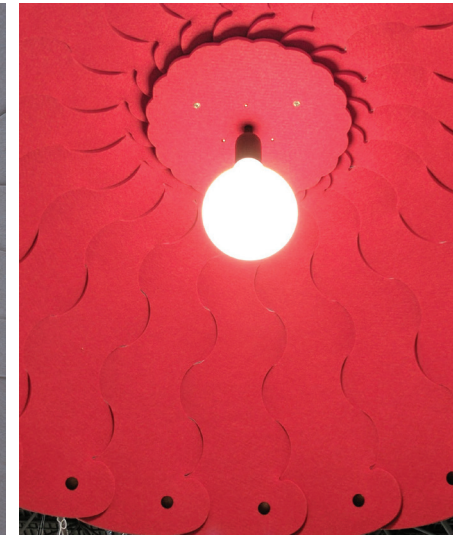

E26 lamping. Hush Oval has two bulbs. Hush Mini shown with G40 frosted bulb (not included).

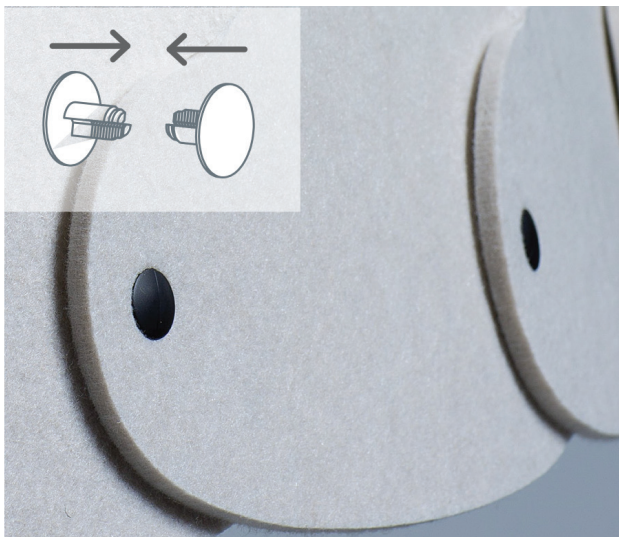

Hush lights are assembled using plastic ratchet rivets that push from each side and lock in place to hold the component pieces together.



LEAD TIME:
Average lead time: 6-8 weeks
(expediting possible for an upcharge)

Hush can be shipped as a kitset, or fully assembled.

PLN GROUP